


DSK Series

Bearing-Mounted Magnetic Clutch With Hub

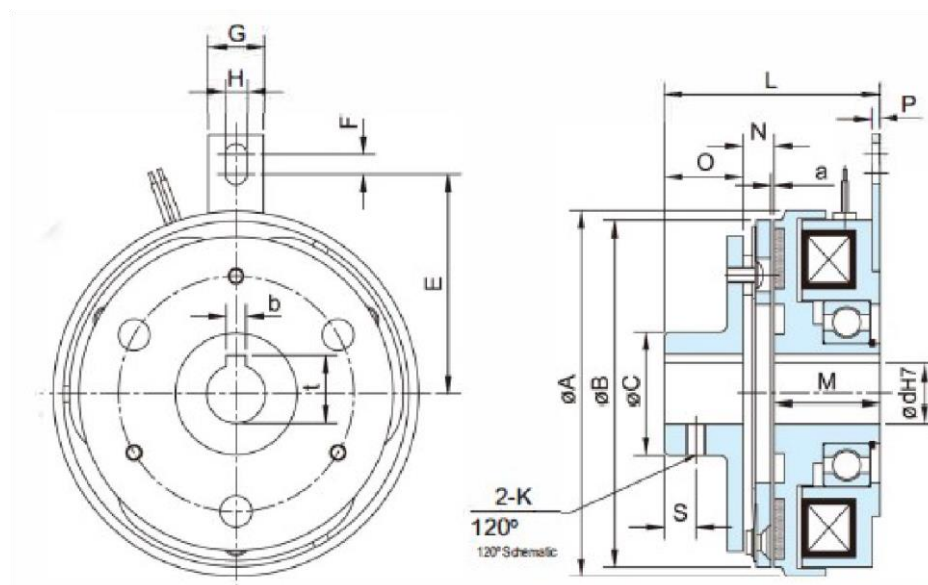

Model	DSK0S6AAB	DSK1S5AA	DSK2S5AA	DSK005AA	DSK010AA	DSK020AA
Static Torque (Nm)	5.5	11	22	45	90	175
Dynamic Torque (Nm)	5.0	10	20	40	80	160
Power [24V] (W) @ 20°C	14	22	26	29	37	44
Radius	A	74	93	116	144	225
	B	70	88	110	137	217
	C	27.5	31	41	49	65
	E	39.75	56	61.45	77.15	99
	F	5	5	4.3	4.9	10
	G	12	14	16	16	25
Shaft	H	4.5	5.5	6.5	6.5	8.5
	K	M5	M5	M6	M6	M8
	L	45.2	54.75	64.1	73.6	93.8
	M	25	26.5	30.1	34	43
	N	6.2	7.75	9	10.9	12.8
	O	15	20	25	30	38
	P	2	2	2	2	3
	S	6	8	10	12	14
	d	15 (12)	20 (15)	25 (20)	30 (25)	40 (30)
	b	5 (4)	5	7 (5)	7	10 (7)
	t	17.3 (13.8)	22.3 (17.3)	28.3 (22.3)	33.3 (28.3)	43.8 (33.3)
	a	0.2 (±0.05)			0.3 (+0.05/-0.1)	0.5 (-0/-0.2)
	Weight (kg)	0.6	1.1	1.9	3.4	7.2
Protective Device	470KD07	GD80KD10		GD80KD14		